

MCE0010C0-0090R0TBB



FEATURES AND BENEFITS

- Compact, fully enclosed splash proof design
- Highest power performance
- Individually balanced cells
- Over 1,000,000 duty cycles
- Ultra-low internal resistance

TYPICAL APPLICATIONS

- Automotive
- Industrial
- Telecommunications
- Railway transportation
- Uninterruptible Power Supplies(UPS)

SPECIFICATIONS

ELECTRICAL

Capacitance

Nominal capacitance	10 F
Capacitance tolerance	+20% / -0%

Voltage

Rated voltage	90 V
Absolute Maximum Voltage	95 V

Resistance

ESR, DC	120 mΩ
---------	--------

Current

Maximum continuous current ($\Delta T=40^{\circ}C$)	25 A
Maximum peak current, 1 sec.	230 A
Leakage current (25°C, after 72h)	0.5 mA

TEMPERATURE

Operating temperature range (Cell case temperature)	-40°C to +65°C
---	----------------

Storage temperature range (Storage uncharged)	-40°C to +70°C
---	----------------

PHYSICAL

Weight	8 kg
---------------	------

Power Terminals	Terminal Block
------------------------	----------------

Recommended Wire Size	6mm ²
------------------------------	------------------

Vibration Specification	GB-T 11287-2000
--------------------------------	-----------------

Shock Specification	GBT 14537-1993
----------------------------	----------------

Environmental Protection	IP65
---------------------------------	------

Internal Temperature Sensor	Temperature Switch
------------------------------------	--------------------

Alarm method: Using a contact switch, which is closed at ordinary time, and open when module is over temperature. Rated load: 250VAC 2A

Switch value	65°C±5°C
--------------	----------

Module Voltage Monitoring	Over voltage Alarm
----------------------------------	--------------------

Alarm method: Using a contact switch, which is closed at ordinary time, and open when module is over voltage. Rated load: 0.50A at 125VAC, 1A at 24VDC

Switch value	Over 95V
--------------	----------

DEFINITION OF TERMINAL (WIRE COLOR)

Yellow	Over temp. alarm
Green	Over voltage alarm
Red	
Black	

POWER AND ENERGY

Usable power density (Pd)	1,010 W/kg
----------------------------------	------------

Impedance match power density (Pmax)	1,680 W/kg
---	------------

Gravimetric energy density (E_{max})	1.4 Wh/kg
---	-----------

Energy available	11.2 Wh
-------------------------	---------

LIFE

High Temperature (at Rated Voltage & Maximum operating Temperature)	1,500 hours
---	-------------

Capacitance change (% decrease from minimum initial value)	≤20%
---	------

ESR change (% increase from maximum initial value)	≤100%
---	-------

Room Temperature (at Rated Voltage at 25°C)	10 years
---	----------

Capacitance change (% decrease from minimum initial value)	≤20%
---	------

ESR change (% increase from maximum initial value)	≤100%
---	-------

Cycle Life (Number of cycles)	1,000,000
---	-----------

Capacitance change (% decrease from minimum initial value)	≤20%
---	------



ESR change (% increase from maximum initial value)	≤100%
---	-------

Shelf Life (Stored uncharged up to a maximum storage temperature)	2 years
---	---------

Factory High-Pot Test	1,500 V DC
------------------------------	------------

Environment humidity	≤96%
-----------------------------	------

MCE0010C0-0090R0TBB

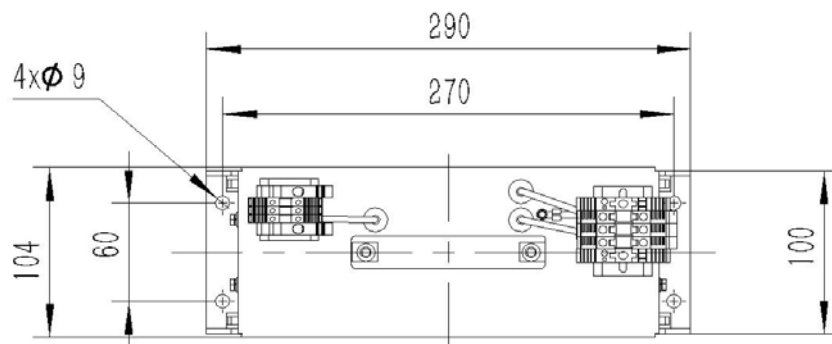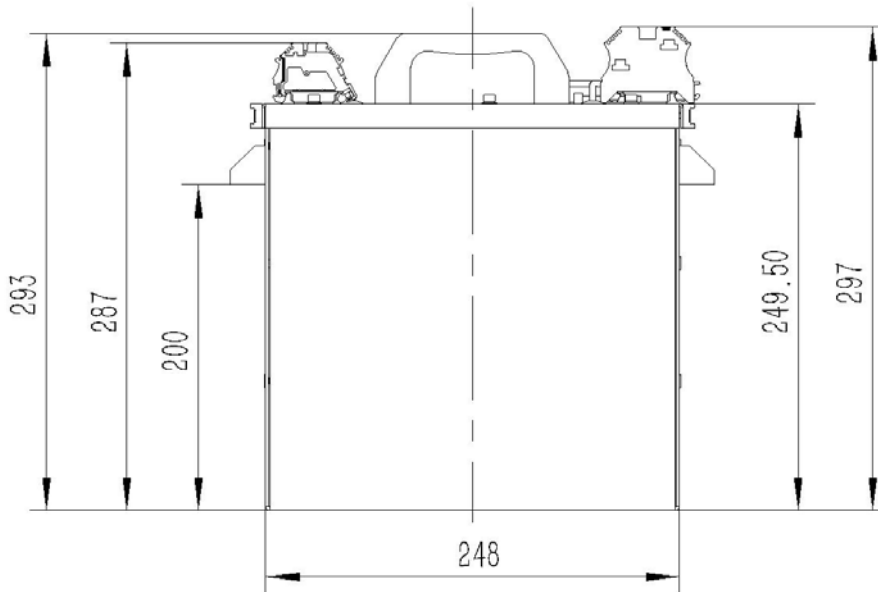

Part Number	Dimension (mm)			Package Quantity(set)
	L (±0.5mm)	W (±0.5mm)	H (±0.5mm)	
MCE0010C0-0090R0TBB	290.0	100.0	297.0	5

Product dimensions are for reference only unless otherwise identified. Product dimensions and specifications may change without notice.
Please contact SPS directly for any technical specifications critical to application.